



Canales 15/20/30/40/50 c/s ángulo y casquillos CANALFIX



Medidas en cm.

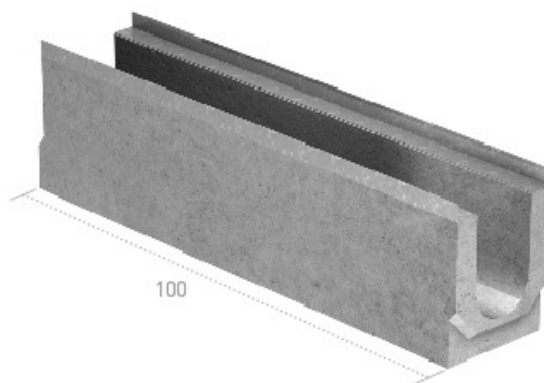

Ref.	A	B	C	h	H	Peso kg/u.	M palet	Tipo reja	Con fijación	Consultar precios
CA15H13CC	15	10	16	7	13	32	30	Fundición	•	
CA15H22CC	15	10	16	14	22	40	30	Fundición	•	
CA15H27CC	15	10	16	19	27	51	30	Fundición	•	
CA15H13CC	15	10	16	7	13	32	30	Estampada y Tramex		
CA15H22CC	15	10	16	14	22	40	30	Estampada y Tramex		
CA15H27CC	15	10	16	19	27	51	30	Estampada y Tramex		
CA20H20CC	20	12	21	9	20	87	16	Fundición	•	
CA20H28CC	20	12	21	17	28	84	16	Fundición	•	
CA20H34CC	20	12	21	25	34	92	16	Fundición	•	
CA30H23CC	30	22,5	32	10	23	91	15	Fundición	•	
CA30H30CC	30	22,5	32	16	30	106	9	Fundición	•	
CA30H35CC	30	22,5	32	26	35	116	9	Fundición	•	
CA30H42CC	30	22,5	32	33	42	130	9	Fundición	•	
CA40H45CC	40	31	43	35,5	45	143	8	Fundición	•	
CA50H67CC	50	34	56	48	67	369	4	Fundición	•	




Capacidad hidráulica Canalfix litros/segundo

Ref.	Pendiente	0,5%	1%	1,5%	2%
CA15	H 13	3,1	4,5	5,5	6,3
	H 22	9,9	14	17,1	19,8
	H 27	13,5	19,1	23,4	27

CA20	H 20	9,2	13,1	16	18,6
	H 28	17,7	25	30,6	35,4
	H 34	22	31,2	38,2	44,1
CA30	H 23	32,9	46,6	57	65,9
	H 30	52,5	74,3	91,3	105,4
	H 35	68,5	96,9	118,7	137,1
	H 42	88,4	125,3	153,2	176,9
CA40	H 45	237,4	335,8	411,3	474,9
CA50	H 67	265,7	375,2	460,5	530,9

Reja plancha acero estampada ligera.


Medidas en cm.

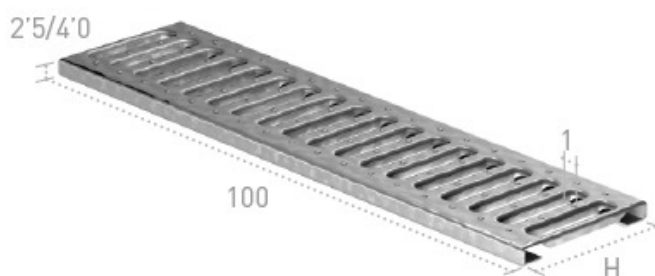

Compatibilidad canal	Ref.	H	Consultar precios
CA15CC	RECNL100EE	15,5	

Reja entramada galvanizada normal. Tramex


Medidas en cm.

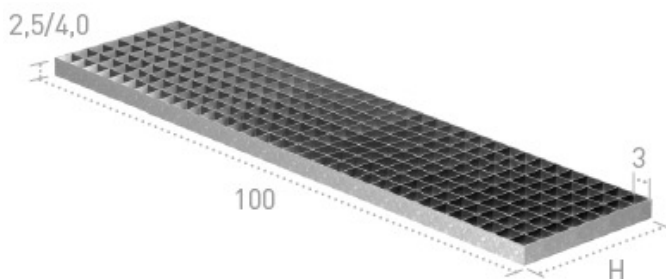

Compatibilidad canal	Ref.	H	Consultar precios
CA15CC	RECANL100E	15,5	

Rejas fundición dúctil reforzadas

Medidas en cm.

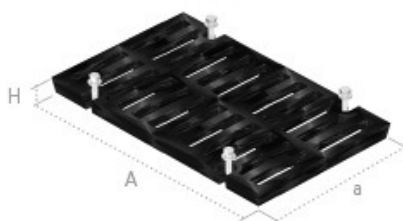

Compatibilidad canal	Ref.	H	Long. ext. reja A	Long. ext. reja a	Paso libre	Sup. dm ² absorción	Peso kg/u.	Clase	Consultar precios

CA15CC	RCA15/400	2,3	50	15	10	3	8	D-400
CA20CC	RCA20	2,7	50	20	12	3,5	10	C-250
CA20CC	RCA20/400	2,7	50	20	12	3,5	14	D-400
CA30CC	RCA30	2,7	50	30,5	23	5,5	15	C-250
CA30CC	RCA30/400	2,7	50	30,5	23	5,5	20	D-400
CA4045CC	RCA40/400	2,7	50	40	34	8	19	C-250
CA4045CC	RCA40505	5,3	50	40	32	7,5	25	D-400
CA50CC	RCA50	7	98,5	49,5	40	16	59	400 KN
CA50CC	RCA50/400	7	98,5	49,5	40	16	65	D-400